

TJ-2004

A New Generation Tar-Jel

TECHNICAL DATA SHEET



A no waste, no hassle, safer alternative to harsh solvents.

TJ-2004 is heavy duty.

TJ-2004 is a d-Limonene based citrus degreaser that stays where you put it. TJ-2004 clings to all surfaces — even verticals. Maximum contact, maximum clean. Just spray it on, let it set and wipe or rinse it off. It's that simple!

TJ-2004 Emulsifies and Removes:

Asphalt	Grease	Permanent Markers	Tire Tracks
Adhesives	Inks	Scuff Marks	Tree Sap
Carbon	Oils	Stickers	Wax
Dyes	Paint Overspray	Tar	

Step 1:



This is a mixture of grease, oil and gook coming directly from a burned out motor from our own factory. We baked it at over 350° for over two hours.

Step 2:




Spray on TJ-2004 and watch the jell cling, emulsifying even the most caked surfaces.

Step 3:



Once it's set, watch it work. When ready, wipe or rinse it off. It's that simple!

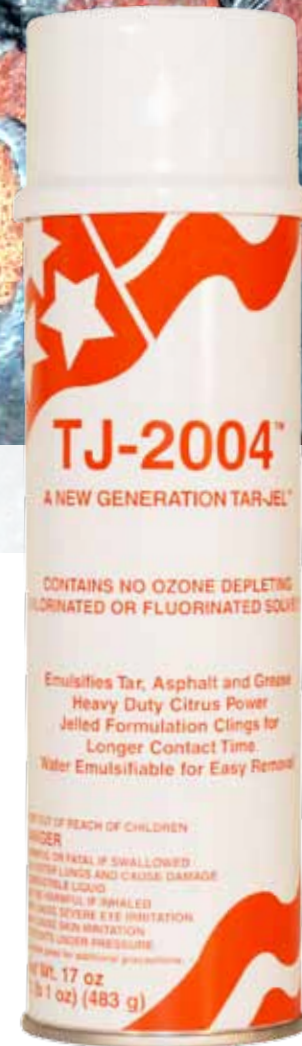

Use to Safely Degrease:

Automobiles	Plastics
Ceramic Tile	Porcelain
Enamel	Printing Presses
Finished Wood	Quarry Tile
Formica	Rollers
Lawn & Garden Equipment	Tools
Linoleum	Vinyl
Metals	



**Continental
Research
Corporation**

HASSLE FREE BUSINESS SINCE 1967

© 2010 Continental Research Corporation. [102110]

091207



TJ-2004™ is a d-Limonene based citrus degreaser that stays where you put it. Its clinging jell formula allows for maximum contact time on surfaces. **TJ-2004™** will not run off.

TJ-2004™ quickly emulsifies tar, asphalt and grease for easy removal from all types of vehicles, equipment and masonry surfaces such as brick, stone, concrete and more. Just spray it on, let it set and rinse it off!

Use **TJ-2004™** to degrease automobiles, trucks, tractors, lawn mowers, boats and more. Excellent for degreasing heavy industrial machinery, municipal equipment, concrete floors and driveways, vertical surfaces and other hard-to-reach areas.

SAFELY REMOVES AND DISSOLVES:

Asphalt	Dyes	Oils	Tar
Adhesives	Grease	Permanent Markers	Tree Sap
Carbon	Inks	Scuff Marks	Wax

SAFE FOR DEGREASING:

Ceramic Tile	Formica	Printing Presses	Tools
Enamel	Linoleum	Quarry Tile	Vehicles
Equipment	Metals	Rollers	Finished Wood
Porcelain	Stainless Steel		

DIRECTIONS FOR USE: SHAKE WELL BEFORE USING

NOTE: When using this product on painted surfaces, check a small area to make sure paint is not affected. Not for use on engines.

1. Test in inconspicuous area to determine suitability.
2. Spray **TJ-2004™** directly on soiled surface.
3. Allow a few seconds to penetrate. Agitate for tougher jobs.
4. Wipe the surface with a clean damp cloth or sponge, or rinse with water.
5. Reapply if necessary.

PRECAUTIONARY STATEMENTS

DANGER: Aspiration hazard - contains petroleum distillates. Do not swallow. Can enter lungs and cause damage. Wash thoroughly after handling. Do not use on or near ignition sources such as heat, sparks, open flame, welding arcs, static electricity, etc. Do not smoke while using. Avoid contact with eyes, skin and clothing. Direct spray away from face. Avoid inhaling mist or vapor. Use with adequate ventilation. Contents under pressure. Do not puncture or incinerate. Store in a cool (under 120°F) dry location away from heat, sparks, open flame, and direct sunlight. Do not deliberately concentrate and inhale vapors.

NOTE: Do not spray into or on electrical equipment. Pretest on paints and plastics

FIRST AID: EYES—Flush with plenty of water for at least 15 minutes lifting eyelids to insure complete removal. Get medical attention immediately. **INGESTION**—Call a physician or poison control center immediately. Do not induce vomiting unless instructed by a physician. Do not give fluids to an unconscious person.

INHALATION—Get to fresh air. If unconscious, qualified personnel should administer artificial respiration. **SKIN**—Wash thoroughly with soap and water. If irritation arises and persists, call a physician.

NOTE: Aspiration hazard if swallowed.

READ THE MATERIAL SAFETY DATA SHEET (MSDS) BEFORE USING THIS PRODUCT

HMIS Rating: Health — 2; Flammability — 2; Reactivity — 0; Personal Protection — A. CONTAINS (CAS No.): Paraffinic, naphthenic solvent (64742-47-8); Methyl Soyate (67784-80-9); (R)-p-mentha-1,8-diene (5989-27-5); Butoxydiglycol (112-34-5); and 1,1-Difluoroethane (75-37-6).

For Commercial/Industrial Use Only.

SOLD BY: CONTINENTAL RESEARCH CORP.
P.O. Box 15204, St. Louis, MO. 63110
1-800-325-4869
www.crcorp.com



136202940001



TJ-2004™

A NEW GENERATION TAR-JEL™

**CONTAINS NO OZONE DEPLETING
CHLORINATED OR FLUORINATED SOLVENTS**

**Emulsifies Tar, Asphalt and Grease
Heavy Duty Citrus Power
Jelled Formulation Clings for
Longer Contact Time
Water Emulsifiable for Easy Removal**

KEEP OUT OF REACH OF CHILDREN

DANGER

**HARMFUL OR FATAL IF SWALLOWED
CAN ENTER LUNGS AND CAUSE DAMAGE**

COMBUSTIBLE LIQUID

MAY BE HARMFUL IF INHALED


MAY CAUSE SEVERE EYE IRRITATION

MAY CAUSE SKIN IRRITATION

CONTENTS UNDER PRESSURE

See back panel for additional precautions.

**Net Wt. 17 oz
(1 lb 1 oz) (483 g)**

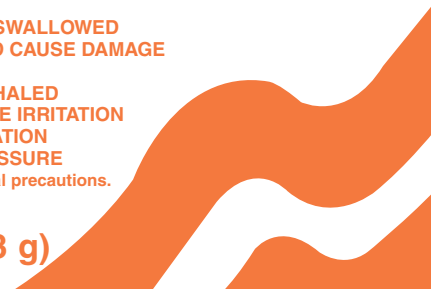

**Continental
Research
Corporation**

HASSLE FREE BUSINESS SINCE 1967