


SCREW EXTRACTORS- “EASY-OUTS”



For removal of broken screws, studs, bolts, or pip fittings.

- DCT “easy-outs” are designed for use in a hand tap with a left hand rotation of the tapered flutes to force out almost any right hand threaded part
- Simple to use: drill a hole in the broken unit to be extracted with the logical diameter drill, insert the proper easy-out and start to turn counter clockwise
- One set is sure to handle most screw extracting jobs
- Made in the USA



13/32




9/32



1/4




5/32



7/64



5/64

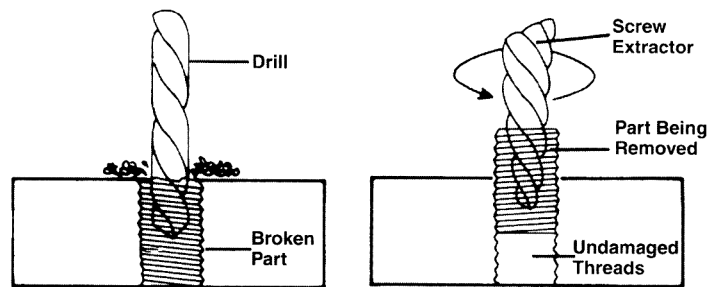

SKU	DRILL SIZE	DIA. SMALL END	DIA. LARGE END	OVERALL LENGTH	FOR BOLT SIZES	UOM
05423	5/64-1	.054	5/32	2	3/16 to 1/4	1
07861	5/64S-1	.054	5/32	2	3/16 to 1/4	3
05424	7/64-2	.08	3/16	2-3/8	1/4 to 5/16	12
07862	7/64S-2	.08	3/16	2-3/8	1/4 to 5/16	3
07864	5/32-3	1/8	1/4	2-11/16	5/16 to 7/16	12
07863	5/32S-3	1/8	1/4	2-11/16	5/16 to 7/16	3
06860	1/4-4	3/16	21/64	2-7/8	7/16 to 9/16	12
06906	1/4S-4	3/16	21/64	2-7/8	7/16 to 9/16	3
07381	17/32S-7	1/2	3/4	4-1/8	1 to 1-3/8	1
07380	17/32-7	1/2	3/4	4-1/8	1 to 1-3/8	3
07808	13/16-8	3/4	1	4-3/8	1-3/8 to 1-3/4	1
07195	1-1/16-9	1	1-9/32	4-5/8	1-3/4 to 2-1/8	1

DCT DURABLE COMPONENT TECH

1-800-285-7965

P.O. BOX 15204, ST. LOUIS, MO 63110